


OTIS - Stage Plot / With House PA

-07/01/13

OTIS is a five piece band; Drum set, 3 Electric Guitar and Electric Bass Guitar.

-Total inputs = 11 XLR (2 XLRs with phantom pwr for condenser drum overheads)

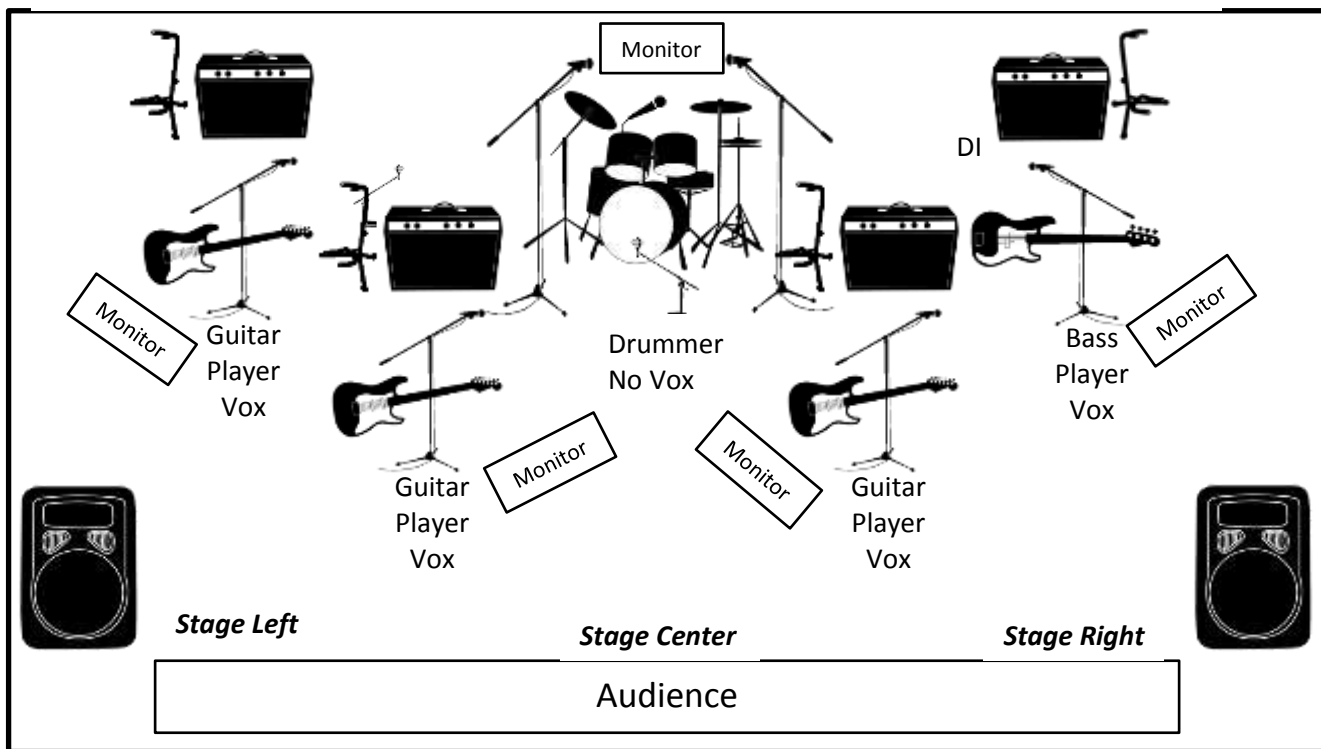

** Electric Guitar x3

1X12 Guitar Combo Amps
Inputs –
1 XLR Amp Mic
1 Vocal mic XLR

** Drum Set, 5 piece

Placement Center Stage or Corner
Inputs –
2 over heads or 1 snare mic(s)
XLR/phantom pwr
1 Bass Drum mic XLR

** Electric Bass Guitar

Placement – Stage Right
2X10 Bass Combo Amp
Inputs –
1 XLR Amp/DI
1 Vocal mic XLR

** PA

For venues with no house PA, band uses its own Bose Tower PA/monitors.

-Placed behind band

For venues with house PA, need five performer monitors, for Guitar Players, Drummer and Bass Player.

-Minimum of three monitors

** Outdoor Shows

For electricity need a 120 AC 20amp outdoor/GFI outlet preferred, a 15amp dedicated circuit outlet is OK.

-We carry a 100' heavy duty extension cord if we need it

Prefer a roof over our heads, under a porch/tent/canopy is fine

-drums/PA does not move very quickly in an unexpected rain shower

** Placement of Band

Need at least a 15' wide x 6' deep, fairly level, area to setup in, more if you can spare it.

-Corners can be a good spot to have the band setup, keeps us out of the way and more space for dancing